

# SPEED DOME CAMERA DSC-300Si5




420X ZOOM, 540TVL  
TDN, 0.0001Lux

## FEATURES

- 410K PIXEL, 1/4" SONY CCD
- 35x Auto Focus Optical Zoom, 12x Digital Zoom(Total Zoom 420x)
- Built-in Hitachi DSP-7 Camera Module, Day & Night (ICR)
- Low Illumination with DSS, 0.0001Lux
- Perfect Back Light Compensation (WDR Functions, Smart Zoom (Speed control by Zoom ratio)
- 250 Programmable Preset Positions, Swing, Group, Trace, Spiral, Auto Flip, Alarm etc.
- 8 Privacy Masking Zones, Motion Detection
- Well suited to Department Store, Building, Parking Lot etc.
- Progressive-Mode Frame Recording Direct to DVR

## DIMENSIONS

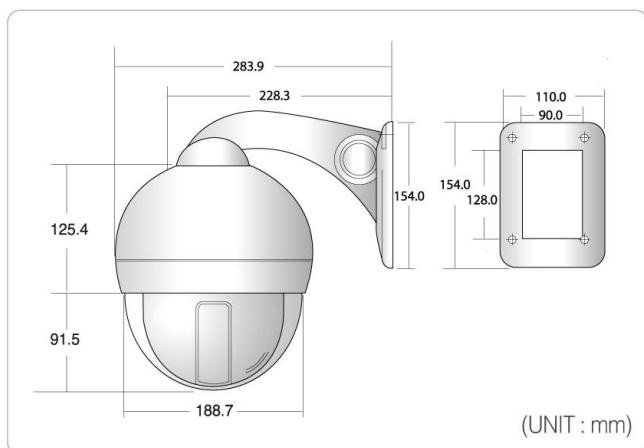

## SPECIFICATIONS

MODEL	DSC-300Si5	
Signal system	NTSC	PAL
Image sensor	1/4" Sony Progressive CCD	
Effective pixels	768(H) × 494(V)	752(H) × 582(V)
Horizontal resolution	More than 540 TVL	
Lens	35x Optical zoom, f=3.4-119mm	
Digital zoom	12x (Total zoom 420x)	
Angle of view	Approx 55.8° (Wide), Approx 1.7° (Tele)	
Minimum illumination	0.1Lux, MAX : 0.0001Lux	
Luminance S/N ratio	More than 50dB	
Video output	1 Vp-p Composite video output 75Ω	
Focus mode	Auto / Manual	
WDR	Auto / Off / Manual (Level 1~126)	
Motion detection	On/ Off	
Shutter speed	Auto	
Back Light	On / Off	
Auto Flip	On / Off	
Alarm in/out	4 Inputs / 1 Relay Output	
Pan/Tilt angle	360° Endless / 92°	
Pan speed	MAX 360°/sec (64 Levels)	
Preset point	250 Presets	
Preset speed	Max 360°/sec (64 Levels)	
Privacy zones masking	8 Zones	
Operating temperature	-5°C ~ 60°C	
Communication system	RS-485 / 422	
Operating Fan/Heater	Built-in	
Operating humidity	Less than 90%RH	
Dimensions	188.7(Diameter)mm x 216.9(Height)mm	
Weight	About 3.1Kg (Without adaptor)	
Construction	ABS body, Clear vandal bubble (PC)	
Power consumption	18W (Max)	
Power supply	AC24V, 60/50 Hz	

## OPTIONAL ACCESSORIES



DSC-30EWP

DSC-20WPP

DSC-20CP

DSC-20ICB