Can control Matrix, CCTV Receiver and DVR (Total Control System)


CONTROL KEYBOARD

DCK-500A

- 512 Units CCTV Receiver and Camera Control
- Protocol Setting from Each Camera
- Lock Function for Camera and Monitor
- Compatible with Alarm Receiver Unit (up to 512 Units Sensor)
- Control Max 64 Monitors & Max 500 Preset Positions
- Jog-Shuttle DVR Control

DIMENSIONS

DCK-500A

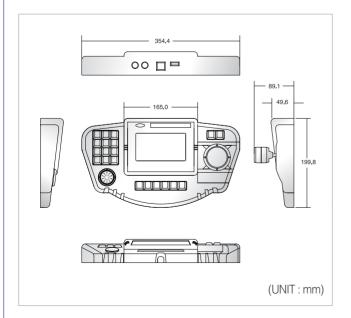



(100 MON (100) April (1) (1) (1)

SPECIFICATIONS

MODEL	DCK-500A
Control	Pan / Tilt, Zoom, Focus, Power, Auto Pan
	AUX Control x2, Preset, Group, Trace
	Matrix, DVR, Quad,
Connecting unit	CCTV Receiver (DRX-502A/500)
	PTZ Dome camera
	Matrix, DVR, Quad,
Sub control	Max, 16units
Video input	2 Ch
Display	5,2" TFT LCD
Communication system	RS-485(422)
Communication speed	Multi Baud Rate 2400/4800/9600bps, N, 8, 1
Connector	Modular cable connection with junction box
	Power supplied via junction box
Receiver control	Max. 512 Receiver
Package	Junction Box(1), 10M cable(1)
Operating distance	Shielded twisted pair cable: Up to 1,2km
Power supply	DC12V, 1A
Power consumption	6W
Operating temperature	0°C ~ +40°C
Weight	About 1,4Kg
Dimensions	354.4(W) × 89.1 (H) × 199.8 (D)mm